

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International publication date

1 July 2004 (01.07.2004)

PCT

(10) International publication number

WO 2004/054809 A1

(51) International patent classification<sup>7</sup>:  
B41N 10/06

B41F 30/04,

(72) Inventors; and

(75) Inventors/Applicants (*US only*): FÜLLGRAF, Stefan [DE/DE]; Am Tiefen Tal 6a, 37115 Duderstadt (DE). KÜMMET, Andreas [DE/DE]; Gertrud- von- Le Fort Str. 22, 97074 Würzburg (DE). LIEBLER, Manfred [DE/DE]; Gartenstr. 21, 97837 Erlenbach (DE). SCHOEPS, Martin [DE/DE]; Roßstr. 20a, 97261 Güntersleben (DE).

(21) International application number: PCT/DE2003/004290

(22) International filing date: 15 December 2003 (15.12.2003)

(25) Language of filing:

German

(26) Language of publication:

German

(74) Attorney: LINS, Edgar; Gramm, Lins & Partner GbR, Theodor-Heuss-Str. 1, 38122 Braunschweig (DE).

(30) Data relating to the priority:

102 58 975.5 16 December 2002 (16.12.2002) DE

103 07 382.5 21 February 2003 (21.02.2003) DE

103 07 383.3 21 February 2003 (21.02.2003) DE

(81) Designated states (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE (utility model), DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI,


(71) Applicant (*for all designated States except US*): CONTITECH ELASTOMER-BESCHICHTUNGEN GMBH [DE/DE]; Breslauer Str. 14, 37154 Northeim (DE). KOENIG & BAUER AKTIENGESELLSCHAFT [DE/DE]; Friedrich-Koenig-Str. 4, 97080 Würzburg (DE).

[continued on next page]

As printed

(54) Title: PRINTING BLANKET ASSEMBLY AND METHOD FOR PRODUCING SAID PRINTING BLANKET ASSEMBLY

(54) Bezeichnung: DRUCKTUCHEINHEIT UND VERFAHREN ZUR HERSTELLUNG EINER DRUCKTUCHEINHEIT

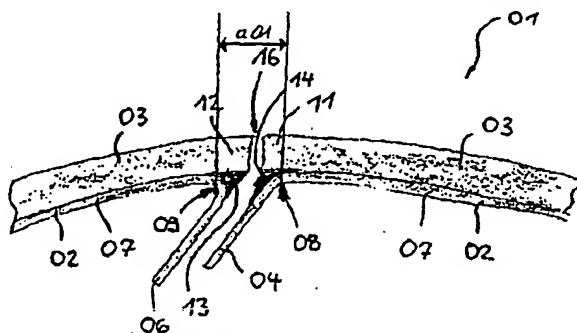

WO 2004/054809 A1

(57) Abstract: The invention relates to a printing blanket assembly for a blanket cylinder of a rotary printing press. The printing blanket assembly comprises a dimensionally stable support plate (02, 18) with two ends, one of which is the forward end and the other one is the trailing end with respect to the rotation of the blanket cylinder, these ends being fastened to the blanket cylinder with folded, printing-blanket free limbs (21, 22). The assembly further comprises a printing blanket (03, 19), fastened to the outside of the support plate (02, 18) and having a forward end (12, 31) and a trailing end (11, 32). Said printing blanket assembly allows for perfect printing also in the area of a gap between the limbs (21, 22) and can be produced in a simple manner. For this purpose, both ends (11, 12; 31, 32) of the printing blanket (03, 19) project beyond the beveled edge (08, 09; 27, 28) of the pertaining limbs (04, 06; 21, 22) of the support plate (02, 18) and one support element (13, 14; 34, 36) for supporting said projection is disposed between the beveled edge (08, 09; 27, 28) and the inside of the printing blanket (03, 19).

[continued on next page]